

'GRECIAN' SPA-STEP

'TURNS AN ORDINARY STEP UNIT INTO A SPA-STEP




1" Slim Line Jets




Pre-drilled Air Seats



Ergonomic Seat Design

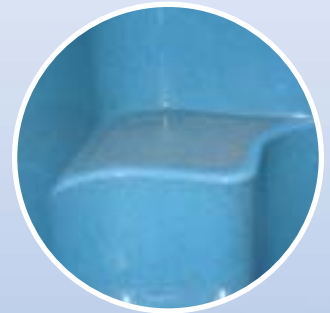


Safety Step

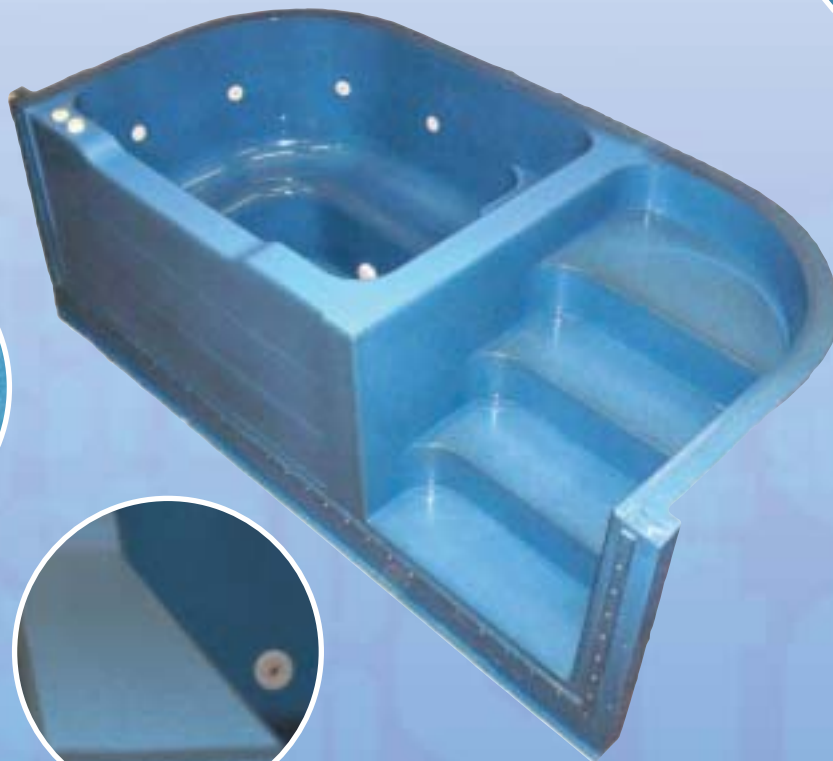

Screw-on Faceplate



Non-Slip Weir

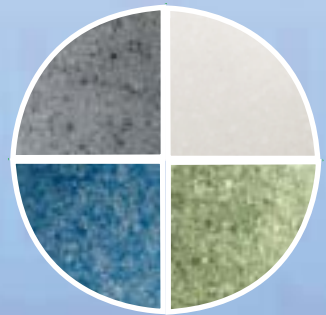


Available in
4
Granite Colours




Why not turn an ordinary step unit into a Spa-Step! Available from Paramount Pool Products, the 'Grecian' Spa Step replaces any standard 10ft wide Step Unit and has an alternative depth option of either 42" or 48" depth.

The Grecian, is simple to install. There is no separate filter package (skid-pack) required as it utilises the same filtration system (1hp pump/24" filter) that is supplied with the swimming pool. All Grecian Spas are manufactured with an air track system to receive an optional 'Air Blower Kit'


Manufactured by Country Leisure (GRP) Ltd solely for Paramount Pool Products. The standard Grecian Spa-Step Unit is manufactured in GRP (Glass Reinforced Plastic) using the best chemical and scratch resistant white polyester gelcoat and reinforced with fibreglass using a high chemical resistant polyester resin. By adding a touch of luxury, the Grecian can also be made to a granite finish available in four different colours.

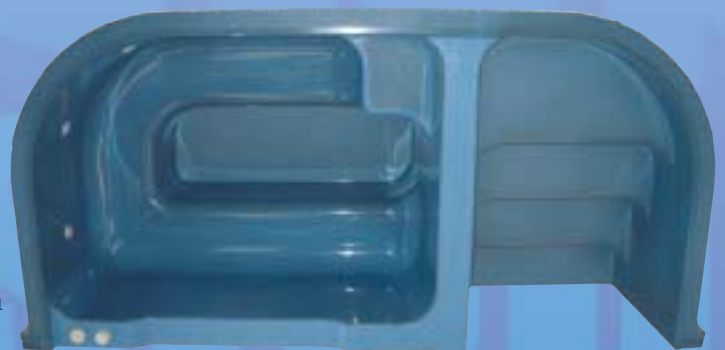


SPA PLUMBING LAYOUT

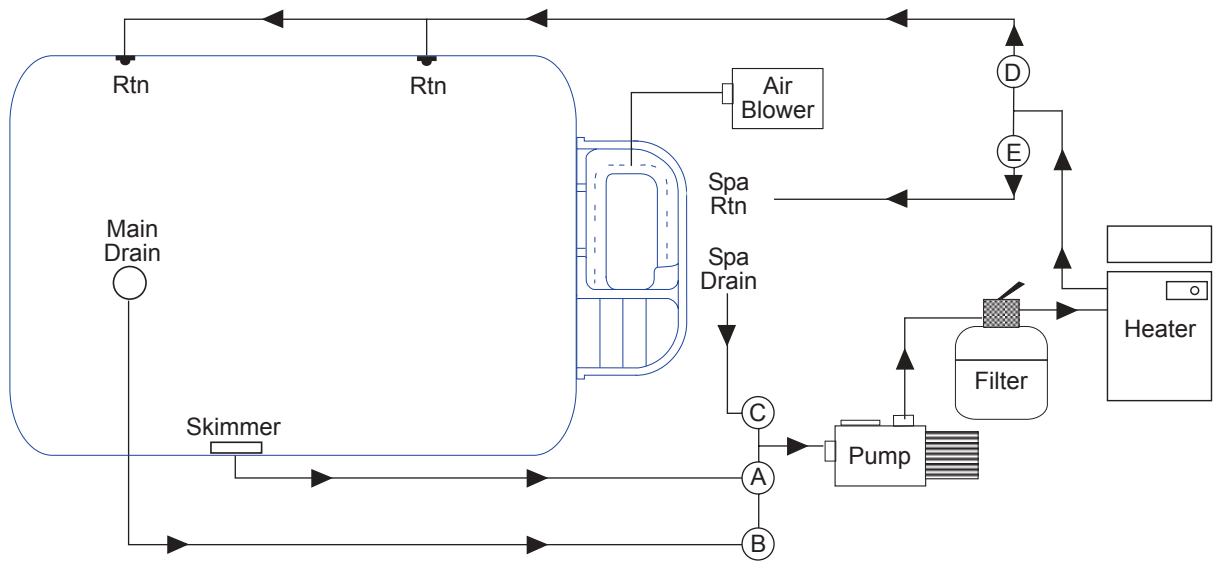


SPA DRAWING- PLAN VIEW

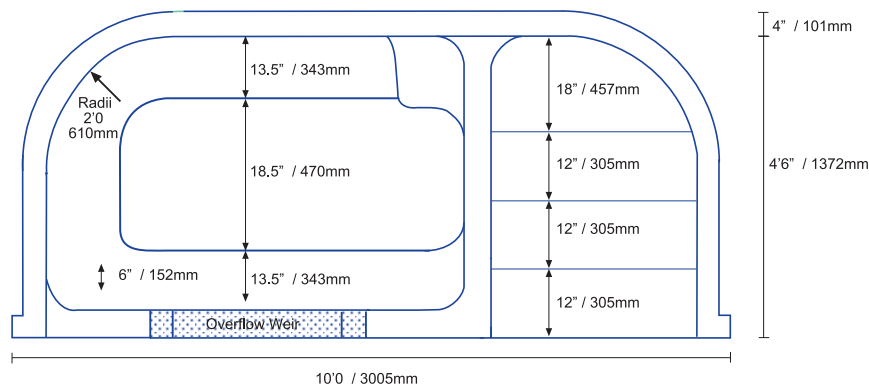

drawings not to scale

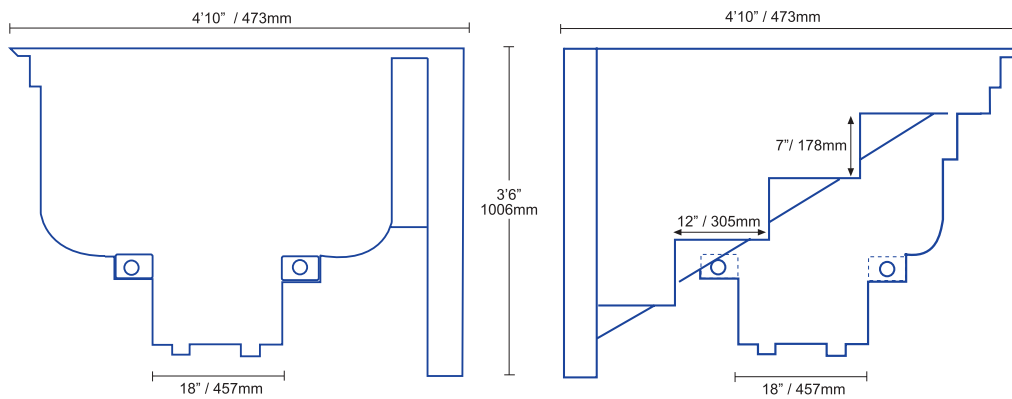

COLOUR LIST



Pewter



Blizzard



Planetarium



Everglade

SPECIFICATION

- | | |
|------------------------------|---|
| Dimension L X W | - 10' x 4'6" Spa Step |
| Height (optional) | - 3'6" 1006mm or 4'0" 1220mm |
| Seat Capacity | - Four (4) Adults |
| Spa Capacity | - approx. 365 gallons / 1660 Litres |
| No. of Jets | - 4 x 1" Spa Jets |
| No. of Drains | - 2 x 1.5" drains |
| Spa Plumbing Required | - 1.5" Standard ABS pipework & (5) Ball Valves (not supplied) |
| Max Operating Temperature | - 110 deg.F |
| Max Distance | - 33ft / 30m from plant room to spa unit |
| Air System | - 2" Air track installed to receive Air Blower (optional) |
| Air System Plumbing Required | - 2" ABS pipework & .5lb Plastic Non-return Valve (not supplied) |
| Air System On/Off Switch | - Soft/Hard Air Button - max. distance 33'/10m |
| Air System Timer | - Frequent operation required for safe circulation |
| Skid Pack | - Not required, see below |
| Filtration | - Utilise Filtration for swimming pool. 1hp/24" min required. |
| Colour | - Plain White Gel Coat Finish |
| Optional Finish | - Granite - Pewter, Blizzard, Planetarium, Everglade -*due to gelcoat manufacturing process, colours and finish may vary throughout step unit |
| Faceplate Fixing | - 316 Stainless Screw |
| Faceplate Finish | - White or Granite Colour |
| Mosaic Tile Band | - Available POA |

